

TRITON-270L

The TRITON-270L is a complete computer, implemented on a board smaller than a credit card, and ready to be designed into your embedded system. TRITON-270L includes a Intel® / Marvell PXA270 processor, SDRAM and Flash memory. The integrated LCD-controller enables direct connection of a LCD screen, and the standard PCMCIA interface permits simple extension and integration into a target system.

The TRITON-270L is specifically targeted at embedded applications where size and the extremely low power consumption of a TRITON-270 are not needed. The TRITON-270L has the same pinout as the TRITON-270, fits into the standard DIMM socket and uses the same mounting hole positions for fastening.

Board highlights:

- 32-bit buffered external memory interface
- high efficiency programmable power supply
- Single 3.3V supply
- All PXA270 interfaces available on a standard DIMM200 socket



TRITON-270 vs. TRITON-270L comparison

	TRITON-270	TRITON-270L
SDRAM	mobile	standard
SDRAM supply voltage	1.8V	3.3V
Sleep mode current	<1mA	~12mA
Different size - width	31mm	43mm
DS1339 RTC onboard	yes	no
Temperature range	-25°C..85°C	0°C..70°C

PXA270

The Intel® / Marvell PXA270 processor is designed to meet the growing demands of a new generation of leading-edge embedded products. Featuring advanced technologies that offer high performance, flexibility and robust functionality, the Intel / Marvell PXA270 processor is packaged specifically for the embedded market and is ideal for the low-power framework of battery-powered devices. The Intel / Marvell PXA270 processor is the first Intel / Marvell XScale® technology-based processor to include Intel® Wireless MMX™ technology. This enables high-performance multimedia acceleration with an industry proven instruction set. Another innovative feature is the Intel® Quick Capture technology, which provides one of the industry's most flexible and powerful camera interfaces for capturing digital images and video. The new capabilities of Wireless Intel SpeedStep® Power Manager technology provide a quantum leap forward in low-power operation, while maintaining the highest levels of performance.


Redboot™

TRITON is delivered with pre-installed Redboot™ firmware. Redboot™ supports several low-level-debugging options and file download via serial XModem. These files can additionally be stored into the permanent flash-memory to be started by command or power-on.

Features

- | | |
|------------------------------------|--|
| Intel / Marvell XScale® Technology | Highly scalable PXA270 core up to 520 MHz |
| Embedded Packaging | 67,6mm x 43 mm x 4,2mm rugged DIMM-Module with fastener |
| Temperature Range | 0°C to 70°C ambient temperature range available |
| Reduced Power Consumption | Wireless Intel SpeedStep® Power Manager technology with four low-power modes can change frequency and voltage dynamically. |
| Incredible Multimedia | Familiar Intel® Wireless MMX™ technology instructions designed for high-performance multimedia and advanced video. |
| Advanced Camera Interface | Intel® Quick Capture technology supports cameras for capturing digital images, video and low-power, real-time previews. |
| Enhanced LCD Controller | Dual-panel LCD with up to 24-bit color. Hardware color space conversion with 256 KB of on-chip SRAM for faster video. Two overlays reduce LCD bandwidth. Integrated Intel Quick Capture technology enables fast video preview. |
| Fast Access to Wireless Data | Intel® Mobile Scalable Link provides up to 416 Mbps link between communications and applications processors. |
| Large Peripheral Set | |

- Quick Capture Interface
- USB 1.1 Host/Client/OTG
- PWM x4
- 4-bit SD I/O
- USIM card
- Keypad controller
- UART x3
- AC97/I2C
- SSP x3
- FS
- LCD controller
- I2C
- JTAG
- MSL Interface

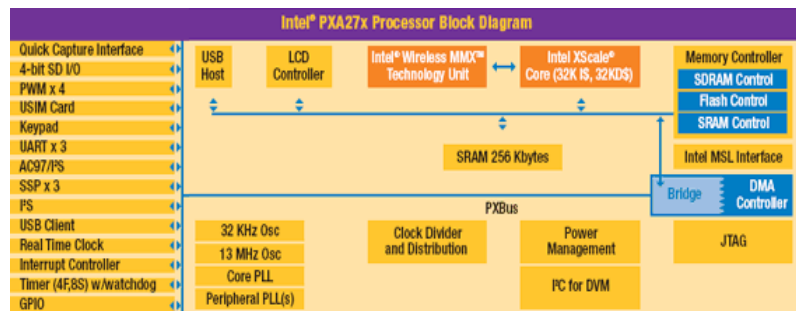

System on module

- Intel® PXA270 (312/416/520MHz)
- 64/128 MByte SDRAM (32bit)
- 16 MByte Flash memory (16bit)
- Buffered 32bit 3,3V external memory interface
- Single 3,3V power supply
- Redboot™ firmware
- DIMM200-module (67,6mm x 43 mm x 4,2mm)
- SMSC LAN91C111 10/100Mbit/s Ethernet controller can be connected directly without additional logic
- Operating temperature range 0°C..70°C
- RoHS compliant

Ordering information

Order Number	PXA270	SDRAM	Flash
TRITON-270L/312/64S/16F	312MHz	64MB	16MB
TRITON-270L/520/128S/16F	520MHz	128MB	16MB

DIMM200 connector pinout (part 1/3)

Pin	Signal	Primary Function /Comment	Secondary Function	Third Function	Supply
1	GPIO0				3V3
2	GPIO1				3V3
3	GPIO9	HZ_CLK		FFCTS / CHOUT0	3V3
4	GPIO10	FFDCD / HZ_CLK		USB_P3_5 / CHOUT1	3V3
5	SYS_EN				3V3
6	BATT_FAULT#	Note: Output, leave unconnected			3V3
7	VDD_FAULT#	Note: OC, 22k pull-up on-board			3V3
8	TRST#				3V3
9	TDI				3V3
10	TDO				3V3
11	TMS				3V3
12	TCK	Note: 22k pull-down on-board			3V3
13	3V3				-
14	GND				-
15	GPIO74		L_FCLK_RD		VCC_LCD
16	GPIO77		L_BIAS		VCC_LCD
17	GPIO87	PCE2# / SSPTXD2	LDD17	USB_P3_1 / SSPSRM2	VCC_LCD
18	GPIO76		L_PCLK_WR		VCC_LCD
19	GPIO73		LDD15		VCC_LCD
20	GPIO14	L_VSYNC	SSPSFRM2	UCLK	VCC_LCD
21	GPIO72		LDD14		VCC_LCD
22	GPIO70		LDD12		VCC_LCD
23	GPIO75		L_LCLK_A0		VCC_LCD
24	GPIO69		LDD11		VCC_LCD
25	GPIO64		LDD6		VCC_LCD
26	GPIO62		LDD4		VCC_LCD
27	GPIO61		LDD3		VCC_LCD
28	VCC_LCD				-
29	GPIO68		LDD10		VCC_LCD
30	GPIO60		LDD2		VCC_LCD
31	GPIO86	SSPRXD2 / PCE1#	LDD16	USB_P3_5	VCC_LCD
32	GPIO58		LDD0		VCC_LCD
33	GPIO59		LDD1		VCC_LCD
34	GPIO63		LDD5		VCC_LCD
35	GPIO66		LDD8		VCC_LCD
36	GPIO65		LDD7		VCC_LCD
37	GPIO67		LDD9		VCC_LCD
38	GPIO71		LDD13		VCC_LCD
39	GPIO19	SSPSCLK2	L_CS	UCLK	VCC_LCD
40	GND				-
41	VCC_USB				-
42	GND				-
43	GPIO44	BTCTS		CIF_LV	3V3
44	GPIO43	ICP_TXD	BTTXD	CIF_FV	3V3
45	GPIO41	FFRXD / KP_MKOUT7	USB_P2_7 / FFRTS	SSPRXD3	3V3
46	GPIO88	USBHPWR1	SSPRXD2	SSPSFRM2	3V3
47	GPIO92	MMDAT0	MSBS		3V3
48	GPIO118	SDA			3V3
49	GPIO111	MMDAT3 / MMCCS1			3V3
50	GPIO34	FFRXD / USB_P2_2	KP_MKIN3	SSPSCLK3	3V3
51	GPIO23	CIF_MCLK	SSPSCLK		3V3
52	GPIO89	SSPRXD3 / AC97_SYSCLK	USBHPEN1	FFRI / SSPTXD2	3V3
53	GPIO25	CIF_LV	SSPTXD		3V3
54	GPIO117	SCL			3V3
55	GPIO26	SSPRXD	CIF_PCLK	FFCTS	3V3
56	GPIO39	KP_MKIN4 / USB_P2_6	FFTXD	SSPSFRM3	3V3
57	GPIO24	CIF_FV	SSPSFRM		3V3
58	GPIO112	MMCMD	MSINS#		3V3
59	GPIO38	FFRI / SSPTXD3	KP_MKIN4 / SSPTXD2	USB_P2_3 / PWM_OUT0	3V3
60	GPIO45	AC97_SYSCLK	BTRTS	CIF_PCLK / SSPSYSCLK3	3V3
61	GPIO36	FFDCD / USB_P2_4	SSPSCLK2	KP_MKIN7	3V3
62	GPIO32	MSSCLK	MMCLK		3V3
63	GPIO22	SSPEXTCLK2 / KP_MKOUT7	SSPSCLKEN2 / SSPSYSCLK2	SSPSCLK2	3V3
64	GPIO110	MMDAT2 / MMCCS0			3V3
65	GPIO27	SSPEXTCLK / SSPSYSCLK	SSPSCLKEN	CIF_DD0 / FFRTS	3V3
66	GPIO16	KP_MKIN5	PWM_OUT0	FFTXD	3V3

Refer to PXA270 datasheet for signal description - non-standard signals marked blue

DIMM200 connector pinout (part 2/3)

Pin	Signal	Primary Function / Comment	Secondary Function	Third Function	Supply
67	GPIO29	AC97_SDATAIN0 / SSPRXD2	I2S_SDATAIN	SSPCLK	3V3
68	GPIO17	KP_MKIN6	CIF_DD6 / PWM_OUT1		3V3
69	GPIO30	I2S_SDATA_OUT	AC97_SDATA_OUT	USB_P3_2	3V3
70	GPIO109	MMDAT1	MMSDIO		3V3
71	GPIO113	I2S_SYSClk	AC97_RESET#	USB_P3_3	3V3
72	USBC_P				VCC_USB
73	GPIO40	SSPRXD2 / KP_MKOUT6	FFDTR	USB_P2_5 / SSPCLK3	3V3
74	USBC_N				VCC_UCB
75	GPIO46	ICP_RXD	STD_RXD / PWM_OUT2		3V3
76	GND				-
77	GPIO31	I2S_SYNC	AC97_SYNC	USB_P3_6	3V3
78	3V3				-
79	GPIO11	EXT_SYNC0 / CHOUT0	SSPRXD2 / PWM_OUT2	USB_P3_1 / 48_MHZ	3V3
80	GPIO42	BTRXD	ICP_RXD	CIF_MCLK	3V3
81	GPIO37	FFDSR / USB_P2_8	SSPSFRM2	KP_MKIN3 / FFTXD	3V3
82	RESET_OUT#				3V3
83	GPIO12	EXT_SYNC1 / CHOUT1	CIF_DD7 / PWM_OUT3	48_MHZ	3V3
84	USBH_P1				VCC_USB
85	GPIO28	AC97_BITCLK / I2S_BITCLK	I2S_BITCLK	SSPSFRM	3V3
86	USBH_N1				VCC_USB
87	GPIO13	CLK_EXT / SSPTXD2	KP_DKIN7	KP_MKIN7	3V3
88	GPIO115	DREQ0 / UEN	CIF_DD3 / UVS1#	MBREQ / PWM_OUT1	3V3
89	GPIO35	FFCTS	USB_P2_1 / KP_MKOUT6	SSPSFRM3 / SSPTXD3	3V3
90	VCC_USIM				-
91	UIO				VCC_USIM
92	GPIO116	CIF_DD2 / DVAL0	AC97_SDATAIN0 / UVS2#	UDET / MBGNT	3V3
93	GPIO114	CIF_DD1	UVS0		3V3
94	GPIO47	CIF_DD0 / STD_TXD	ICP_TXD	PWM_OUT3	3V3
95	GPIO91	KP_MKIN6	USB_P3_1 / UCLK	CIF_DD5	VCC_USIM
96	GND				-
97	GPIO90	KP_MKIN5	USB_P3_5 / URST#	CIF_DD4	VCC_USIM
98	VCC_BB				-
99	xRDYB	Note: RDY = xRDYA & yRDYB, 22k pull-up on-board			3V3
100	GPIO99	KP_DKIN6	AC97_SDATAIN1	KP_MKIN5 / FFTXD	3V3
101	xRDYA	Note: RDY = xRDYA & yRDYB, 22k pull-up on-board			3V3
102	GPIO95	KP_DKIN2 / AC97_RESET#	CIF_DD4	KP_MKIN6	3V3
103	GPIO50	CIF_DD3 / BB_OB_DAT2	PIOIR#	SSPCLK2	VCC_BB
104	GPIO53	FFRXD / BB_OB_STB	USB_P2_3 / CIF_MCLK	SSPSYCLK	VCC_BB
105	GPIO102	KP_MKIN2 / PCE1#		FFRXD	3V3
106	GPIO94	KP_DKIN1 / AC97_SYNC	CIF_DD5		3V3
107	Unconnected	Note: optional DS1339 Backup Battery Supply Input			-
108	GPIO101	KP_MKIN1			3V3
109	GPIO106	CIF_DD9	KP_MKOUT3		3V3
110	RESET_IN#	Note: Manual Reset Input - Connect to GND for manual reset otherwise leave open			3V3
111	GPIO51	CIF_DD2 / BB_OB_DAT3	PIOIW#		VCC_BB
112	GPIO52	CIF_DD4 / BB_OB_CLK	SSPCLK3		VCC_BB
113	GPIO48	CIF_DD5 / BB_OB_DAT1	POE#		VCC_BB
114	GPIO84	SSPCLK3	BB_IB_STB	CIF_FV	VCC_BB
115	GPIO81	SSPTXD3	CIF_DD0 / BB_OB_DAT0		VCC_BB
116	GPIO55	CIF_DD1	BB_IB_DAT1	PREG#	VCC_BB
117	GPIO85	FFRXD / PCE1#	DREQ2 / BB_IB_WAIT	CIF_LV	VCC_BB
118	GPIO54		BB_OB_WAIT / PCE2#	CIF_PCLK	VCC_BB
119	GND				-
120	GPIO83	SSPFRM3	BB_IB_CLK / FFTXD	CIF_DD4 / FFRTS	VCC_BB
121	GPIO82	SSPRXD3	BB_IB_DAT0	CIF_DD5 / FFDTR	VCC_BB
122	GPIO105	CIF_DD1 / PCE2#	KP_MKOUT2		3V3
123	GPIO57	IOIS16#	BB_IB_DAT3	SSPTXD	VCC_BB
124	GPIO56	PWAIT# / USB_P3_4	BB_IB_DAT2		VCC_BB
125	GPIO108	CIF_DD7 / CHOUT0	KP_MKOUT5		3V3
126	GPIO104	CIF_DD2 / PSKTSEL	KP_MKOUT1		3V3
127	GPIO97	KP_DKIN4	DREQ1 / MBGNT	KP_MKIN3	3V3
128	GPIO107	CIF_DD8	KP_MKOUT4		3V3
129	GPIO96	KP_DKIN3	MBREQ / DVAL1	FFRXD / KP_MKOUT6	3V3
130	GPIO100	KP_MKIN0	DREQ2	FFCTS	3V3
131	GPIO93	KP_DKIN0 / AC97_SDATAOUT	CIF_DD6		3V3
132	1V8	Note: 150mA LDO onboard			-
133	GPIO98	KP_DKIN5 / AC97_SYSClk	CIF_DD0	KP_MKIN4 / FFRTS	3V3

Refer to PXA270 datasheet for signal description - non-standard signals marked blue

DIMM200 connector pinout (part 3/3)

Pin	Signal	Primary Function /Comment	Secondary Function	Third Function	Supply
134	GPIO103	CIF_DD3	KP_MKOUT0		3V3
135	GND				-
136	xBUFEN#	Note: 22k 1.8V pull-up on-board	L: Enable xMD0..32 buffers		3V3
137	xMA9				3V3
138	xMA10				3V3
139	xMA7				3V3
140	xMA8				3V3
141	xMA5				3V3
142	xMA6				3V3
143	xMA3				3V3
144	xMA4				3V3
145	xMA2				3V3
146	xMA1				3V3
147	xMA0				3V3
148	GPIO49 (output only)		PWE#		3V3
149	GPIO79 (output only)	PSKTSEL#	CS3#	PWM_OUT2	3V3
150	xRD/WR#				3V3
151		PCE2#	CS2#		3V3
152		PCE1#	CS1#		3V3
153	xOE#				3V3
154	xWE#				3V3
155	GPIO80 (output only)		CS4#	PWM_OUT3	3V3
156	GPIO33 (output only)	xDVAL1	CS5#	MBGNT	3V3
157	GPIO21 (output only)		xDVAL0	MBGNT	3V3
158	xSDCAS#				3V3
159	xSDCLK0				3V3
160	xDQM3				3V3
161	xDQM2				3V3
162	GND				-
163	3V3				-
164	xMD30				3V3
165	xMD31				3V3
166	xMD28				3V3
167	xMD29				3V3
168	xMD26				3V3
169	xMD27				3V3
170	xMD24				3V3
171	xMD25				3V3
172	xMD22				3V3
173	xMD23				3V3
174	xMD20				3V3
175	xMD21				3V3
176	xMD18				3V3
177	xMD19				3V3
178	xMD16				3V3
179	xMD17				3V3
180	xDQM0				3V3
181	xDQM1				3V3
182	3V3				-
183	GND				-
184	xMD15				3V3
185	xMD14				3V3
186	xMD13				3V3
187	xMD12				3V3
188	xMD11				3V3
189	xMD10				3V3
190	xMD9				3V3
191	xMD8				3V3
192	xMD7				3V3
193	xMD6				3V3
194	xMD5				3V3
195	xMD4				3V3
196	xMD3				3V3
197	xMD2				3V3
198	xMD1				3V3
199	xMD0				3V3
200	GND				-

Refer to PXA270 datasheet for signal description - non-standard signals marked blue